

Feb 21 02 09:05p

Scratch Art Co.

508 583 6001

13520-1010
-1030



DIVISION BUREAU DE
INFORMATION TECHNIQUE
DES CHIMES (REGIMAT)

Reçu 02-21-02



TEST REPORT No (5400)012-0004
March 20, 2000
Page 1/3

Mrs SHANA A ZOGHEIB
ACTA - Sarl
7 Rue Ampère
94200 IVRY SUR SEINE
FRANCE

INTRODUCTION


At the request of the client, the sample was evaluated for compliance with the Mechanical and Physical Hazards, Flammability and Heavy Metals content requirements, per the European Standard EN 71, Part 1 1998, Part 2 1993 and Part 3 1994

Test Start: January 18, 2000

Test Finished: March 10, 2000

Sample Identification: SCRATCH + SPARKLE
Date received: January 12, 2000
Model, Style, Lot No: NA Not Available
Origin: United States
Manufacturer: Scratch-Art Co

DESCRIPTION: Scratch + sparkle

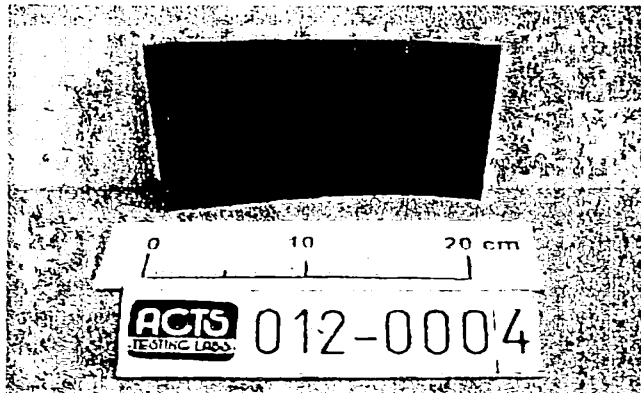

Main used materials:

Coatings/paint
Paper/cardboard

Approximate size(s) (cm):

Card: 14 x 21

V 3 117

The accreditation by COFRAC certifies the expertise of the laboratories for the sole tests covered by the accreditation, which are identified by the > symbol.

This test report can be copied only if its entire version. It contains 3 pages.
EU notified body no. 1000 under directive 89/105/EEC for CE type examinations.
For an appointment of several identical samples, but with different colours, only one sample is subjected to testing according to EN 71, parts 1 and 2.



ACTS TESTING LABS
1000 rue de la République
94200 Ivry-sur-Seine
France

COFRAC
Certification Française
des Organismes
de Contrôle
Technique
1000 rue de la République
94200 Ivry-sur-Seine
France

Feb 21 02 03:06p

Scratch-Art Co.

508 583 8001



DIVISION BIENS DE
CONSUMMATION DU GROUPE
BUREAU VERITAS

TEST REPORT No (5400)012 0004
March 20, 2000
Page 2/3



I. **RESULTS:**

A) **AGE GRADING**

Indicated on the packaging and/or indicated by the client : Not Available
Determined by the laboratory : 2 years and up

B) **MECHANICAL AND PHYSICAL PROPERTIES - REQUIREMENTS (EN 71, Part 1: 1998)**

<u>Parameter</u>	<u>Section</u>	<u>Requirements/Results</u>
a. GENERAL REQUIREMENTS (Section 4)		
1 <u>Materials</u>	4.1	PASS
7 <u>Edges</u>	4.7	PASS
8 <u>Points and wires</u>	4.8	PASS
b. TOYS INTENDED FOR CHILDREN UNDER 36 MONTHS (Section 5)		
NOT APPLICABLE		
c. PACKAGING (Section 6)		
6		
NOT APPLICABLE		
d. WARNINGS AND INSTRUCTIONS FOR USE (Section 7)		
1 <u>General</u>	7.1	see conclusions of the test report

>C) **FLAMMABILITY (EN 71, Part 2: 1993)**

<u>Parameter</u>	<u>Section</u>	<u>Requirements/Results</u>
1. <u>General</u>	4.1	Satisfactory

Feb 21 02 03:06p

Scratch Art Co.

508 583 8081



TEST REPORT No (5400)012-0004
 March 20, 2000
 Page 3/3



DIVISION DES
 LABORATOIRES DU GROUPE
 BUREAU VERITAS

>D) MIGRATION OF CERTAIN ELEMENTS (EN71, Part 3: 1994)

- 012-0004A White paper
- 012-0004B Black coating (47.7 milligrams)
- 012-0004C Clear plastic with silver coating

SOLUBLE ELEMENTS EN 71	012-0004			LIMITS	
	A	B (1)	C	α	β
ARSENIC	< 5	< 5	< 5	25	25
MERCURY	< 10	< 10	< 10	60	25
SELENIUM	< 10	< 10	< 10	500	500
ANTIMONY	< 10	< 10	< 10	60	60
LEAD	< 10	< 10	< 10	90	90
CADMIUM	< 5	< 5	< 5	75	50
BARIUM	6	< 5	< 5	1000	250
CHROMIUM	< 5	< 5	< 5	60	25

Results and limits are reported as milligrams per kilogram (mg/kg).

- α Any toy material except for modelling clay and finger paint.
- β Modelling clay and finger paint

The soluble content was determined by inductively coupled plasma atomic emission spectrometry.

Comments : (1) A test portion of less than 100 mg has been used for testing, the quantity of the appropriate elements was calculated as if 100 mg of test portion had been used

ACTS TESTING LABS

Dominique Billeret,
 R & D Manager

Feb 21 02 03:06p

Scratch Art Co.

508 888 8888

R111

**ALLIED LABORATORIES CORP.**

716 North Iowa Avenue
Villa Park, IL 60181
Phone: 630.279.0390
Fax: 630.279.3114

22758

4/28/00

Scratch Art Company, Inc.
11 Robbie Road, 3B1
P.O.Box 303
Avon, MA 02322
Attn: Alicia Polsky

A sample of " Scratch and Sparkle Glitter Board ", a product of Scratch Art Company, Inc., was examined to determine whether or not the product may be considered safe as defined by the Federal Hazardous Substances Act and by ASTM D - 4236.

The product is a board coated with a glossy, silver colored layer, with a black overlay. The layers are applied as slurries or solutions. All of the volatile components of the slurries are evaporated during the curing of the boards prior to the sale of the product to the public.

When used, small portions of the black coloring are scraped off of the board with a wood stylus.

Based on my 40 years of professional experience, I believe this product conforms to ASTM D-4236 standards and will not present chronic health hazards to users. This statement should be placed on the package label for the product.

This conclusion is based on the knowledge that, when properly used, there is only minimal contact of the black coating with the skin. Any small amounts which may adhere to the skin can be easily and safely removed with soap and water.

Irving I. Domsky Ph.D.
Laboratory Director